


CC Version Standard LED Power Supply(High performance)



Dimensions:(mm/inches)

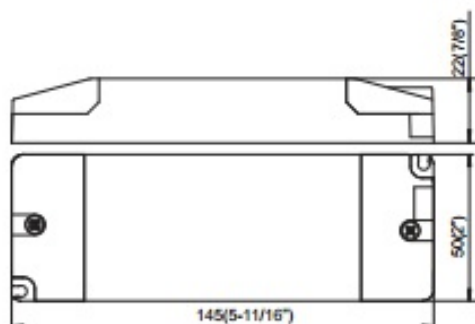

■ Features

- Universal input voltage
- Independent power supply for constant current LED lamp
- Terminal block input, terminal block and 5.5mm(1/4") DC power jack output
- Class II protection against electric shock from direct and indirect contact
- SELV/UL 8750 class 2 output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Efficiency≥83% (AC230V, full load)

■ Standards

EN 61347-1
EN 61347-2-13
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547
UL 8750 CLASS 2
FCC18A



NEW direct plug-in feature!

■ Characteristics

Rated input voltage: AC100-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output current	Output voltage range	λ	t_a	t_c	L x W x H	Approval
SLT20-350IF-1 SLT20-350IF-1(DC) ★	350mA	6-56V	0.95	-20-50°C (-4-122°F)	90°C (194°F)	145x50x22mm (5-11/16"x2"x7/8")	UL SEMKO
SLT20-500IF-1 SLT20-500IF-1(DC) ★	500mA	6-40V	0.95	-20-50°C (-4-122°F)	85°C (185°F)	145x50x22mm (5-11/16"x2"x7/8")	UL SEMKO
SLT20-700IF-1 SLT20-700IF-1(DC) ★	700mA	6-29V	0.95	-20-50°C (-4-122°F)	85°C (185°F)	145x50x22mm (5-11/16"x2"x7/8")	UL SEMKO
SLT20-1050IF-1 SLT20-1050IF-1(DC) ★	1050mA	5-19V	0.95	-20-50°C (-4-122°F)	85°C (185°F)	145x50x22mm (5-11/16"x2"x7/8")	UL SEMKO

★ Additional DC Socket output for Model No.with Suffix-DC